


User Manual

KJ100G-C9

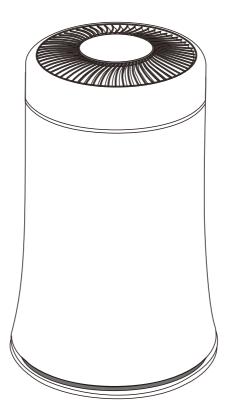

Please read this manual carefully before using product and strictly following the guidelines. Please keep it appropriately for future reference.

Safety precautions



Please read the instructions carefully before using and strictly follow them when used.



 \bigcirc

Such ICONS indicate that they cannot be done and "forbidden" content.



Such ICONS indicates that the content must be executed, "mandatory".

Safety precautions




Please read the instructions carefully before use and strictly follow them when used.



* Packaging Contents: Main enginex1, Power Cordx1 , Manualx1

Components



- $\ensuremath{\textcircled{}}$ Wind grating
- 2 Ring
- ③ Fuselage shell
- ④ Air inlet
- 5 DC socket
- 6 Bottom plate
- ⑦ Filter
- [®] Base
- 9 Power adapter

Packing list

Air purifier	User manual	Adapter

Specification

Product name	Air Purifier	Model	KJ100G-C9
Rated voltage/frequency	100-240V~ 50/60Hz	Product size	21*21*33cm
Power	24W	Net weight	1.8kg
Noise	≤58dB(A)	Applicable area	30 m²
CADR(PM2.5)	100m³/h	Fuselage materials	ABS,PP

Getting Started

- 1. Invert the equipment after unpacking it.
- 2. Rotate the base cover to take out the filter by the guide arrow.
- 3. Replace the filter after opening the package. Take care to rotate the base cover
- in revert direction described on step 2.
- 4. Pick out the power adapter and then access to the corresponding port.
- 5. Insert the plug of power adapter into the upright purifier.



1. Take out the transparent packaging bag and properly put it;



2. Turn the bottom cover counterclockwise and remove the filter;




3. Open the packaging bag of the filter and put it back into the filter according to the direction;




4. Install the bottom cover clockwise;



5. Place the product on a flat surface, insert the adapter and connect the power supply.



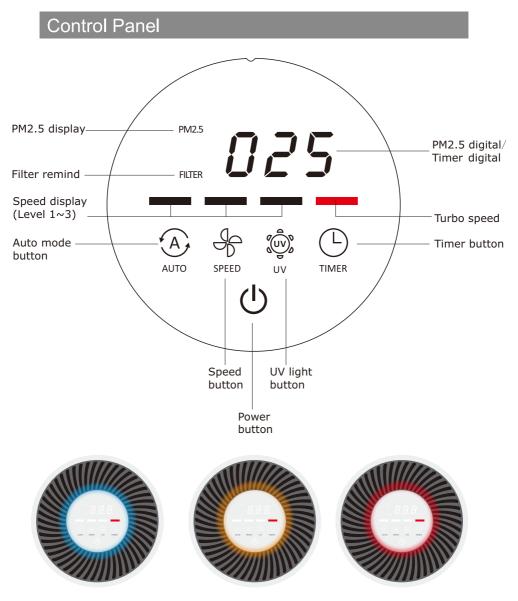

The indicator Lamp will light up, the Ring Lamp will light up in corresponding colors on the basis of air quality.

Color of Ring Lamp 🗩	Blue	Orange	Red
Air quality 🗩	Good	Moderate	Bad

How to use

MODE	MENU	FUNCTIONAL DESCRIPTION
ON/OFF	டு	 After the power is connected, click the power button to turn the machine motor; The machine is started in the auto mode. The sensor is preheated. After 30 seconds of operation, the air quality indicator will display according to the current air quality and automatically select the corresponding gear to run. The three-digit digital tube displays data in PM2.5 by default.
AUTO MODE	A,	 In the state of manual wind speed adjustment or sleep mode, tap the auto button, and the wind speed control will be automatically controlled according to the data returned by the sensor. Max speed in auto mode will be level 3.
MANUAL CONTROL	J	 In auto mode or sleep mode, click the speed button, and the machine runs according to the user's specified wind speed. Max speed in manual mode will be turbo.
UV/ FILTER RESET		 The UV lamp is turned off by default. In any state, the UV lamp button can be turned on manually. After using the machine for 1800h, the filter prompt light will be lit and displayed in the form of breathing light. Filter reset: press the sleep button for 3 seconds (there is a sound), the filter indicator is off, and the timing starts again.
TIMER	(Touch the timer button on the operation panel, and the 3-bit digital tube will automatically turn into the time interface, and the timing stops will be 1-8 hours respectively. After setting, the timing interface will display 5S clock, and then the panel will automatically return to the PM2.5 display state. Timer cancel: if the timing light is on for a long time with timing setting, press the timing button for 3S for a long time to cancel the current timing, and the timing function indicator will be off after the cancellation. The timing is completed according to the set running time. The timing function is closed and the machine automatically shuts down.

Maintenance

Before attempting to perform any maintenance on the purifier, disconnect the power adapter!

Filter

1、Reference time of changing filter: about once a year

◇It depends on different places and usages. For example, changing time of filter may shorter in contaminated zones or smoking areas, etc.

 $\diamond \mbox{Please}$ change the filter if the cleaning effect is not good.

- 2、Cleanup routines: biweekly
- ◊Use soft brush, dry cotton cloth or cleaner to clean the surface of filter.
- ◊Do not use water to wash the filter.
- \diamond Do not press firmly or pull, because the filter can be broken or deformed easily. Please change a new one before using if it's damaged.
- •External surface
- ◊Please use dryness soft fabric to wipe the surface, inlets and outlets.
- ◊Do not use the chemical cleaning agent.
- +Long-term idle
- $\diamond \mbox{Cut}$ off the power
- ◇Clean the surface and filter
- Store at a dry and cool place and cover with plastic bag

Frequently Asked Questions

Phenomenon	Reason & Solution
Smell	 The filter is too dirty because of not replacing for a long time— replace the filter Use the purifier in moist conditions or make water infiltrate the filter— replace the filter Add some unsuitable spice into the spice box— replace the spice box Reuse the filter after a long time without cleaning— replace the filter if the problem cannot be solved after cleaning Detect the odor of burning— stop running the purifier immediately and cut off the power; contact manufacture to repair it
No wind	 The first gear is regarded as sleep-mode so that only a breeze of wind can be felt The machine out of operation — check the power supply system; replace the power adapter or contact manufactures to service
Ineffectiveness	 The filter no longer has any effect—replace the filter ○Use at inappropriate places, such as oversize places
Three gear indicator light up at the same time	 Machine malfunctions—cut off the power immediately and contact manufactures to service